

Express-BD74

COM Express Basic Size Type 7 Module with Intel® Xeon® D SoC and 4 SODIMMs

Features

- 4 SO-DIMMs, up to 128GB dual channel DDR4 at 1866/2133/2400MHz ECC (dependent on SoC SKU)
- Intel® Xeon® D SoC (up to 16 cores)
- Two 10G Ethernet and NC-SI support
- Up to 32 PCIe lanes (24x Gen3, 8x Gen2)
- GbE, two SATA 6 Gb/s, four USB 3.0/2.0
- Supports Smart Embedded Management Agent (SEMA®) functions
- Extreme Rugged operating temperature: -40°C to +85°C (build option with selected SoC SKU)

Specifications

Core System

CPU

Intel® Xeon® D and Pentium® D SoC, 14nm process (formerly "Broadwell-DE")

Xeon® D1559 1.6/2.1GHz 18MB, 45W (12C) (eTEMP)
Xeon® D1539 1.6/2.2GHz 12MB, 35W (8C) (eTEMP)
Xeon® D1577 1.3/2.1GHz 24MB, 45W (16C)
Xeon® D1548 2.0/2.6GHz 12MB, 45W (8C)

Note: SKUs not listed above and D1577/D1559 may be supported on a project basis. please contact your ADLINK representative.

Supports: Intel® VT (including VT-x, VT-d, VT-x with Extended Page Tables), Intel® HT Technology, Intel® SSE4.2, Intel® 64 Architecture, Intel® Turbo Boost Technology 2.0, Intel® AVX2, Intel® TSX-NI, Intel® Platform Protection Technology with Intel® TXT, Execute Disable Bit, Intel® Data Protection Technology with Intel® Secure Key, Intel® AES-NI

Note: Availability of features may vary between processor SKUs.

Memory

Dual channel 1867/2133/2400 MHz DDR4 ECC memory in four SODIMM sockets (two on top, two on bottom), up to 128GB (dependent on SoC SKU)

Note: Only D1548 supports up to 2400 MHz

Embedded BIOS

AMI EFI with CMOS backup in 16MB SPI BIOS

Cache

24MB for D1577
18MB for D1559
12MB for D1548/D1539


Expansion Busses

PCIe x16 or 2 PCIe x8 or 4 PCIe x4 (Gen3)
8 PCIe lanes (Gen3): AB connector, Lanes 8-15
6 PCIe lanes (Gen2): AB connector, Lanes 0/1/2/3/4/5
Up 2 PCIe lanes (Gen2): CD connector, Lanes 6/7
LPC bus, SMBus (system), I²C (user)

Note: PCI Express lane 7 support in place of GbE

SEMA Board Controller

Supports: Voltage/current monitoring, power sequence debug support, AT/ATX mode control, logistics and forensic information, flat panel control, general purpose I²C, Failsafe BIOS (dual BIOS, opt. support), watchdog timer and fan control

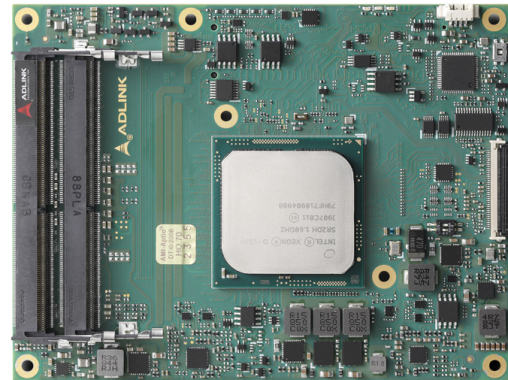

Debug Headers

40-pin multipurpose flat cable connector for use with DB-40 debug module providing BIOS POST code LED, BMC access, SPI BIOS flashing, power testpoints, debug LEDs

10G Ethernet

Intel® MAC/Controller

Intel® 10G Ethernet Controller integrated in SoC

10G Interface

2x 10GBASE-KR

10G Sideband Signals

10G_INT
10G_PHY_MDIO/MDC & SDA/SCL
10G_PHY_CAP
10G_PHY_RST
10G_LED_I2C
10G_SFP_I2C
10G_SDP

NC-SI

NC-SI supported on AB connector, connect to GbE controller

Ethernet

Intel® MAC/PHY: Intel® Ethernet Connection i210
Interface: 10/100/1000 GbE connection

Multi I/O and Storage

USB: 4x USB 3.0/2.0 (USB 0, 1, 2, 3)
SATA: 2x SATA 6Gb/s (SATA0,1)
Serial: 2 UART ports with console redirection
GPIO: 4 GPO and 4 GPI

Super I/O

Supported on carrier if needed (standard support for W83627DHG-P)

Specifications

- **TPM**

Chipset: Infineon
Type: TPM 2.0

- **Power**

Standard Input: ATX: 12V±5%, 5Vsb ±5%; AT: 12V±5%
Wide Input: ATX: 8.5-20V, 5Vsb ±5%; AT: 8.5-20V
Management: ACPI 5.0 compliant, Smart Battery support
Power States: C1-C6, S0, S1, S3, S4, S5, S5 ECO mode (Wake-on-USB S3/S4, WOL S3/S4/S5)
ECO mode: Supports deep S5 mode for power saving

- **Operating Systems**

Standard Support

Windows 10 (64-bit)
Windows Server 2012 (64-bit)
Windows 7 (64-bit)
Linux (64-bit)

Extended Support (BSP)

Linux (64-bit)

- **Mechanical and Environmental**

Form Factor: PICMG COM.0 Rev 3.0, Type 7
Dimension: Basic size: 125 mm x 95 mm

Operating Temperature

Standard: 0°C to 60°C
Extreme Rugged: -45°C to +85°C (build option, standard voltage only)
Note: Extreme Rugged availability dependent on SoC SKU

Humidity

5-90% RH operating, non-condensing
5-95% RH storage (and operating with conformal coating)

Shock and Vibration


IEC 60068-2-64 and IEC-60068-2-27
MIL-STD-202F, Method 213B, Table 213-I, Condition A and Method 214A, Table 214-I, Condition D

HALT

Thermal Stress, Vibration Stress, Thermal Shock and Combined Test

Note: "build option" indicates an alternative BOM configuration to support additional or alternative functions that are not available on the standard product.
Be aware that these "build option" part numbers will need to be newly created and this will result in production lead times.

Functional Diagram

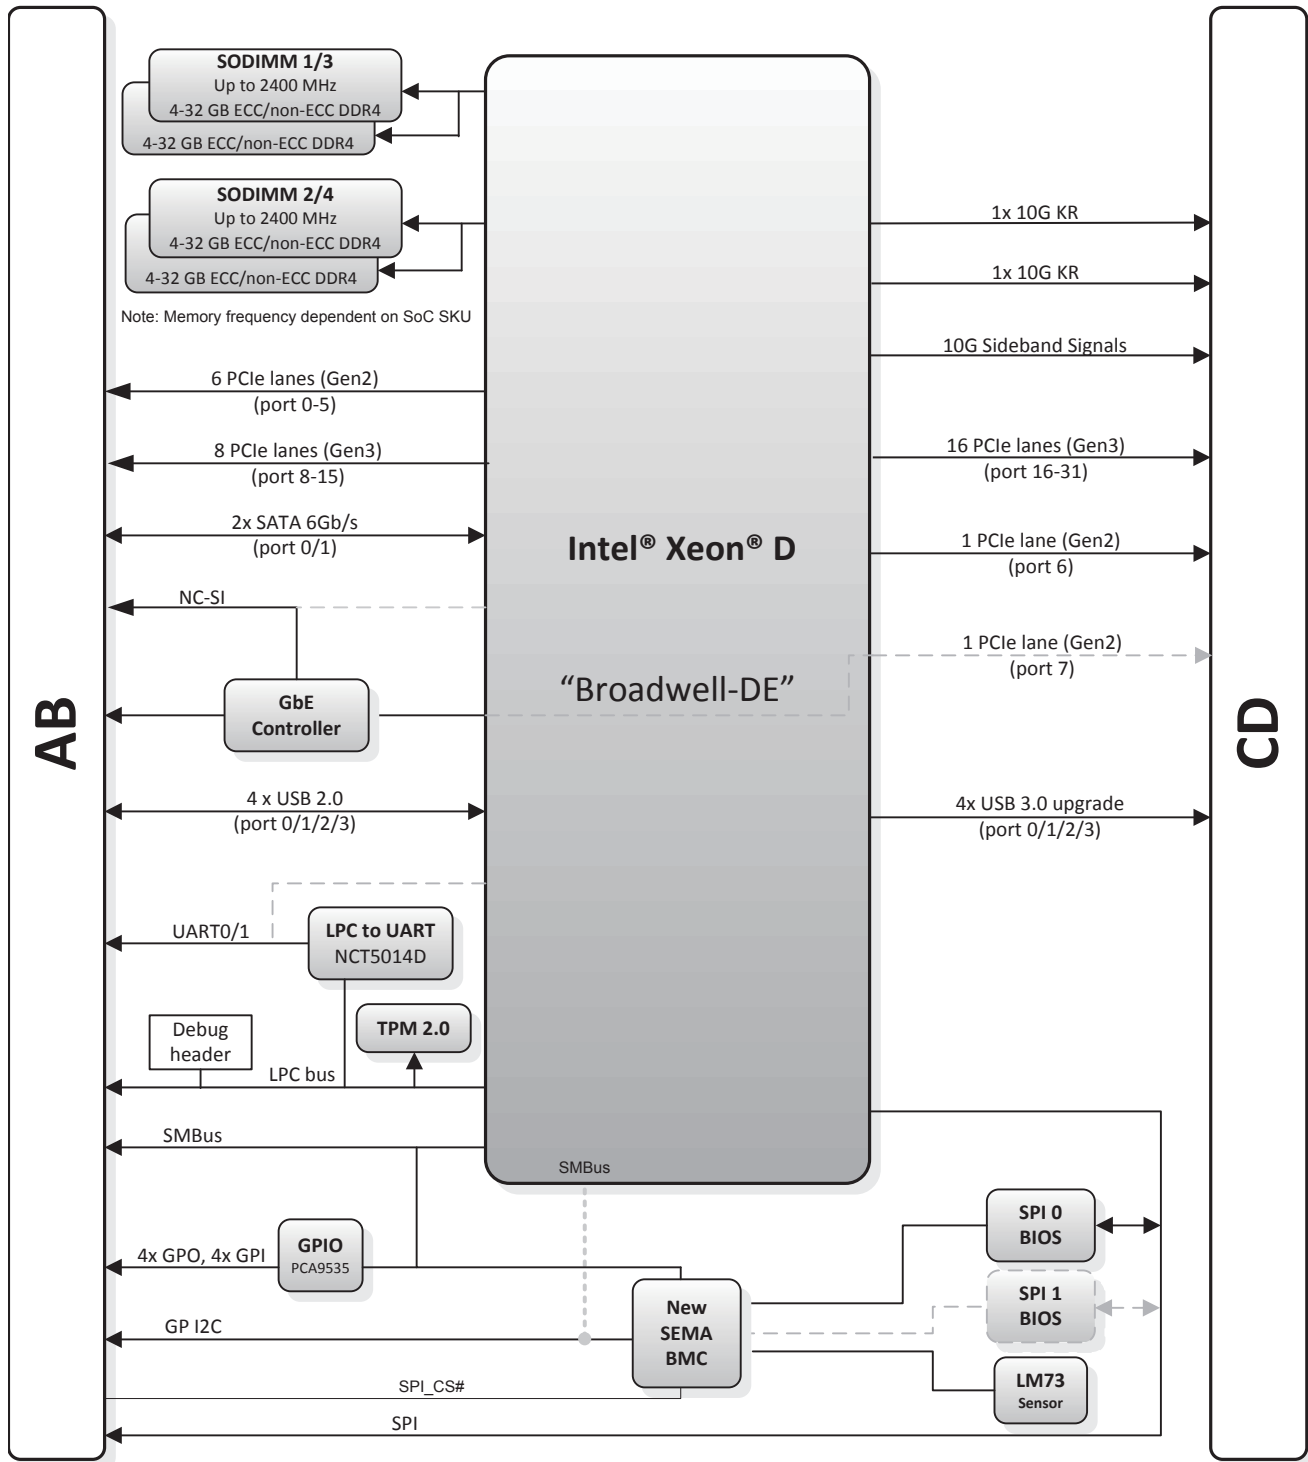

Ordering Information

- **Express-BD74-D1559**
Basic COM Express Type 7 module with Intel Broadwell-DE D1559, 12 core, at 1.5/2.1GHz, 4 SODIMMs
- **Express-BD74-D1539**
Basic COM Express Type 7 module with Intel Broadwell-DE D1539, 8 core, at 1.6/2.2GHz, 4 SODIMMs

Note: All modules above support SFP+ 10GbE. Supports for 10GBASE-T (Copper) is by project basis.

Starter Kit

- **COM Express Type 7 Starter Kit Plus**
Starter kit for COM Express Type 7

Note: Two starter kits are available: one supporting SFP+ and one supporting 10GBASE-T.

Accessories

Heat Spreaders

- **HTS-BD7-BL**
Heatspreader for Express-BD7 with threaded standoffs for bottom mounting
- **HTS-BD7-BTL**
Heatspreader for Express-BD7 with through hole standoffs for top mounting

Passive Heatsinks

- **THS-BD7-BL**
Low profile heatsink for Express-BD7 with threaded standoffs for bottom mounting
- **THS-BD7-BTL**
Low profile heatsink for Express-BD7 with through hole standoffs for top mounting
- **THSH-BD7-BL**
High profile heatsink for Express-BD7 with threaded standoffs for bottom mounting

Active Heatsink

- **THSF-BD7-BL**
High profile heatsink with fan for Express-BD7 with threaded standoffs for bottom mounting

Note: Express-BD7 and Express-BD74 use the same thermal solutions.

A SMARTER SOLUTION starts from inside

Main offices

Group HQ

Data Respons ASA
Sandviksveien 26
NO-1363 Høvik, Norway
Tel.: +47 67 11 20 00
info@datarespons.com

Germany

Data Respons Solutions GmbH
Amalienbadstr. 41, Bau 53
DE-76227 Karlsruhe
Tel.: +49 721 480 887 10
sales@datarespons.de

Sweden

Data Respons Solutions AB Jan
Stenbecks Torg 17, III
SE-164 40 Kista
Tel.: +46 8 501 688 00
sales@datarespons.se

Denmark

Data Respons Solutions A/S
Smedeholm 10
DK-2730 Herlev
Tel.: +45 88 32 75 00
sales@datarespons.dk

Norway

Data Respons Solutions AS
Sandviksveien 26
NO-1363 Høvik
Tel.: +47 67 11 20 00
sales@datarespons.com

Taiwan

Data Respons Asia Taiwan Branch
18F-6 NO. 738, Chung-Cheng Road,
Chung-Ho, New Taipei
Tel.: +886 2 8226 2150